



Feature特征


- Universal AC input/Full range
国际通用全范围交流输入
- Protections: Short circuit/Over load
短路保护, 过载保护
- Cooling by free air convection自然风冷
- High efficiency, long life and high reliability
高效率, 长寿命和高可靠性
- Using 105°C long life electrolytic capacitors
使用105度长寿命电容器
- 100% full load burn-in test 100%满载老化
- Installed with EMI filter, minimum wave
内装EMI滤波器, 极小纹波

CE RoHS


Specification性能	Model型号	T-30A			T-30B		
		Ch1	Ch2	CH3	Ch1	Ch2	CH3
Dc voltage 直流电压		5V	12V	-5V	5V	12V	-12V
Rated current 额定电流		3A	1A	0.5A	3A	1A	0.5A
Current range 电流范围		0-3A	0-1A	0-0.5A	0-3A	0-1A	0-0.5A
Rated power 额定功率		30W			33W		
Ripple & noise 纹波和噪音	Note:1	70mVp-p	100mVp-p	70mVp-p	70mVp-p	100mVp-p	100mVp-p
Voltage ADJ. range 电压调整范围		+10%-5%	+10%-5%	+10%-5%	+10%-5%	+10%-5%	+10%-5%
Voltage tolerance 电压精度	Note:2	±2.0%	±5.0%	±3.0%	±2.0%	±5.0%	±5.0%
Line regulation 线性调整率	Note:3	±0.5%	±1.5%	±1.5%	±0.5%	±1.5%	±1.5%
Load regulation 负载调整率	Note:4	±0.5%	±3%	±3%	±0.5%	±3%	±3%
Setup, rise, hold up time 启动, 上升, 保持时间		500ms, 50ms, 60ms/230VAC					
Input voltage range 输入电压范围		85-132VAC/170-264VAC, 47-63HZ, Selected by switch由开关选择					
Efficiency 效率		71%			73%		
Input current 输入电流		0.8A/115V 0.45A/230V					
Inrush current 浪涌电流		Cold start冷启动: 30A/230V					
Leakage current 漏电流		<1mA / 240VAC					
Overload protection 过载保护		105%-150%Rated output power; Type:Hiccup; Reset:auto recovery 105%-150%额定输出的功率; 模式: 打嗝模式; 复位: 自动恢复					
Working temp humidity 工作温度, 湿度		-25~+70°C, 20 ~ 90% RH					
Storage temp humidity 储存温度, 湿度		-40~+85°C, 10 ~ 95% RH					
Temp coefficient 温度系数		±0.03%/°C (0 ~ 50°C) (+5V)					
Vibration 耐振动		10 ~500Hz, 2G 10min/cycle周期, X、Y、Z Each axes轴各60min					
Withstand voltage 耐压性		I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
Isolation resistance 隔离电阻		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH					
Safety standards 安全标准		Meet UI1012 requirement (Not apply for the mark) 满足UL1012要求 (不申请标记)					
EMC standards EMC标准		Meet FCC part 15J condition class B			满足FCC部分15J条件, 等级B		
Overall dimension 外形尺寸		129x98x38mm					
Weight 重量		0.4Kg					
<p>Note:1.Ripple & noise are measured at 20MHZ of bandwidth by using 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor; 纹波和噪声测量方法: 20HZ带宽下测量, A12双绞线, 终端并0.1uF&47uF的电容器;</p> <p>Note:2.Tolerance:includes set up tolerance, line regulation and load regulation; 精度: 包括设定误差, 线性调整率, 负载调整率;</p> <p>Note:3.Line regulation is measured from low line to hige line at rated load; 线性调整率测量方法: 在额定负载下, 从低电压到高电压测试;</p> <p>Note:4.Load regulation is measured from 0% to 100% rated load. 负载调整率测量方法: 负载从0%到100%</p>							

■ Mechanical Specification 结构尺寸


Unit 单位: mm

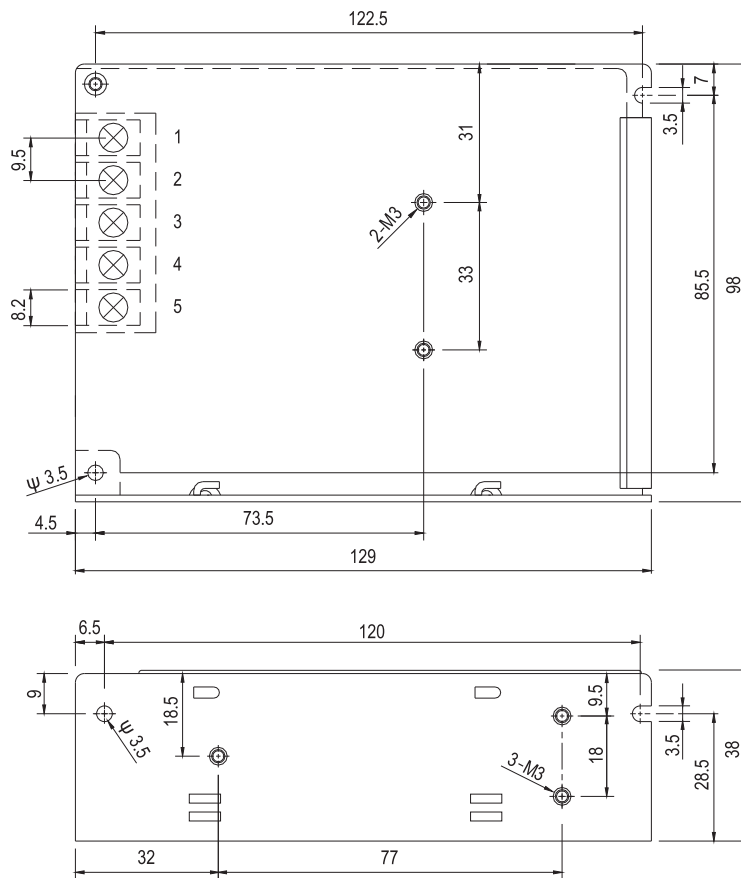

■ Derating Curve 降额曲线

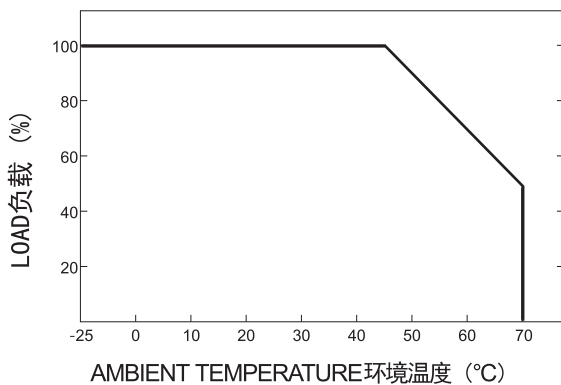

■ Output Derating VS Input Voltage 静态特性曲线

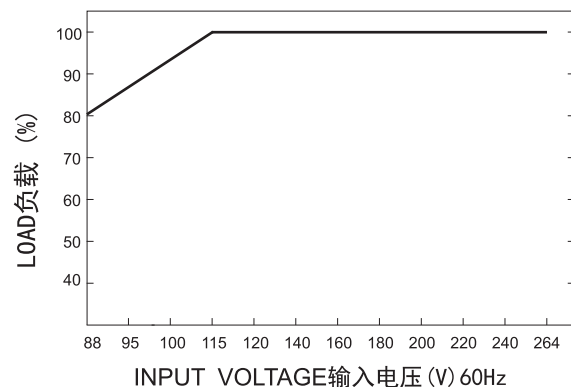

浙江欧迪龙电子科技有限公司
Zhejiang Aotoro Electronic Technology CO.,LTD

ADD: Liu Huang Road 2188#, Liushi town, Yueqing city, Zhejiang province, PRC 325604
浙江省乐清市柳市镇柳黄路2188号

TEL: 86-577-61758688 FAX: 86-577-62757002
Http://www.aotoro.com E-mail: aotoro@aotoro.com